
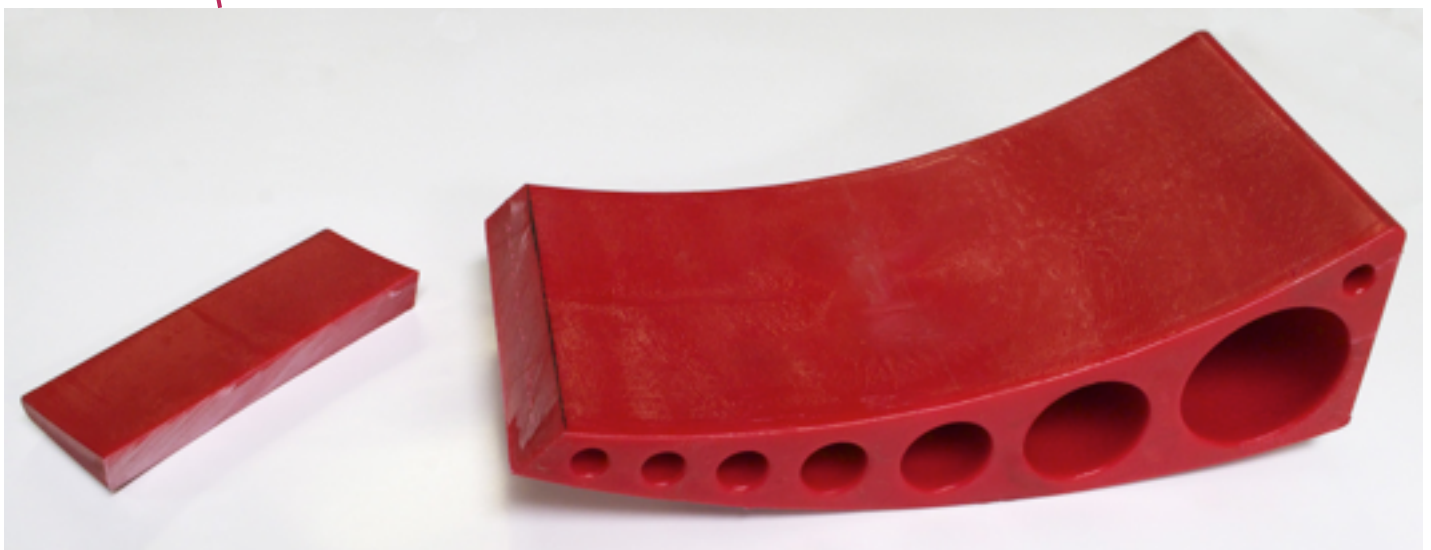


**The Andersen Camper Leveler (part #3604) can be trimmed to fit into tighter wheel spacing as shown below.**

For most situations, you can make a cut line anywhere up to 2.5" back from the tip

In really tight situations, you can make your cut line anywhere up to 4" back from the tip (max point between 1st and 2nd hole)


These cuts can be angled or straight (no usable difference)

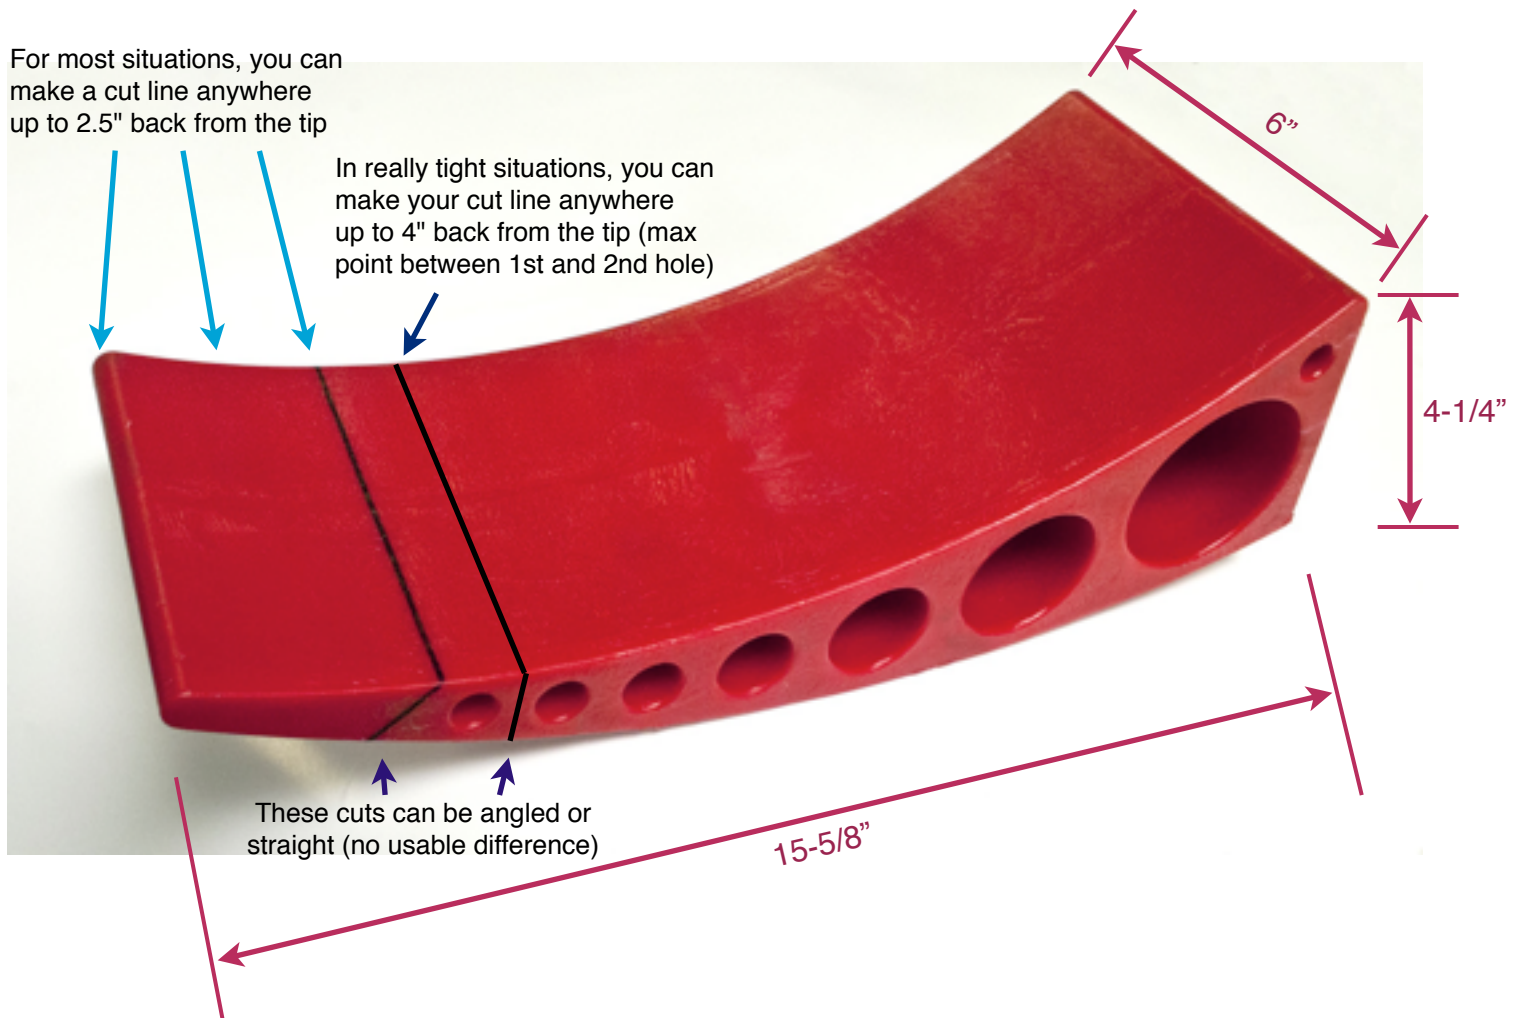


**QUESTION:** What is the minimum distance between wheels that is needed for the Camper Leveler to work?

**ANSWER:** Tire size and spacing can vary a lot from trailer to trailer —bigger tires can be closer together (Fig. 1), but smaller tires have less ground clearance so they need to be further apart for the Camper Leveler to fit (Fig. 2). An approximate distance for most standard tires is around 2" to 3".


**However,** a great solution for tight situations is to 'trim' the end of the Camper Leveler as shown in Figures 3 & 4 below (you can trim up to 4" off with no adverse effect).

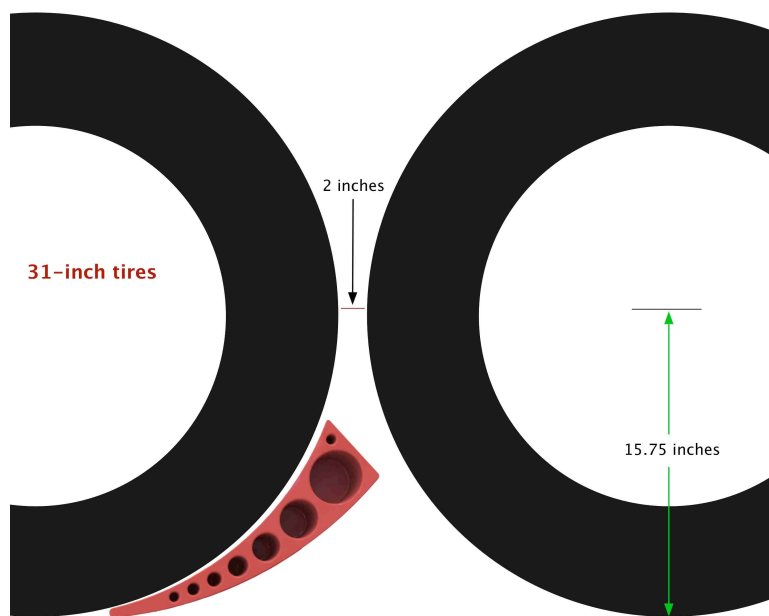


**Figure 1**

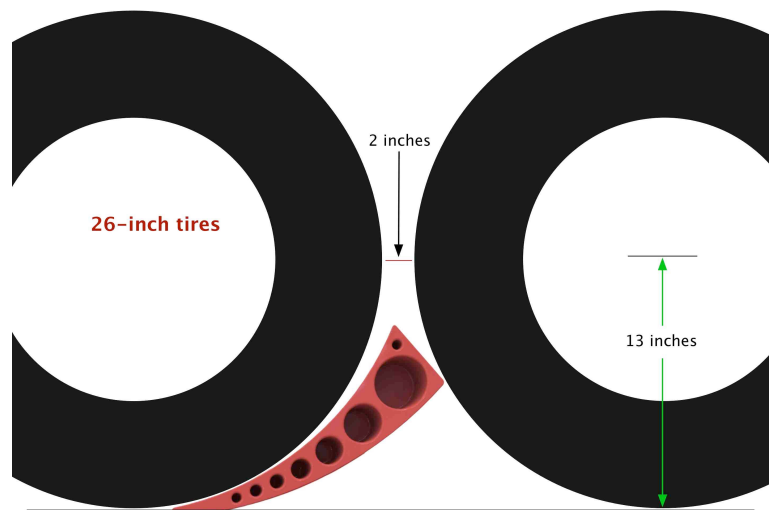

**Figure 2**

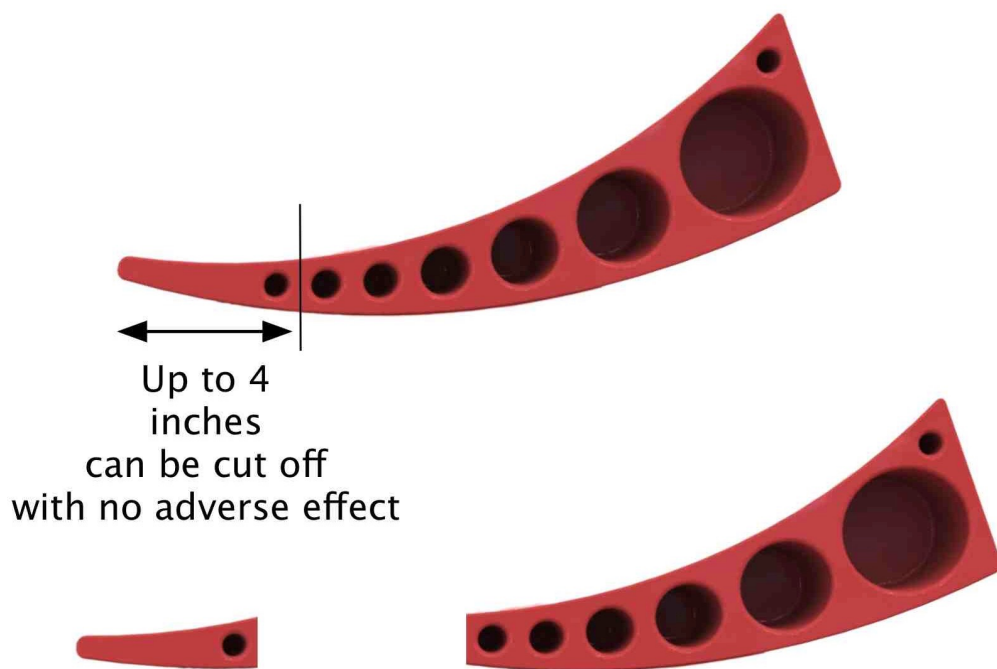

**Figure 3**

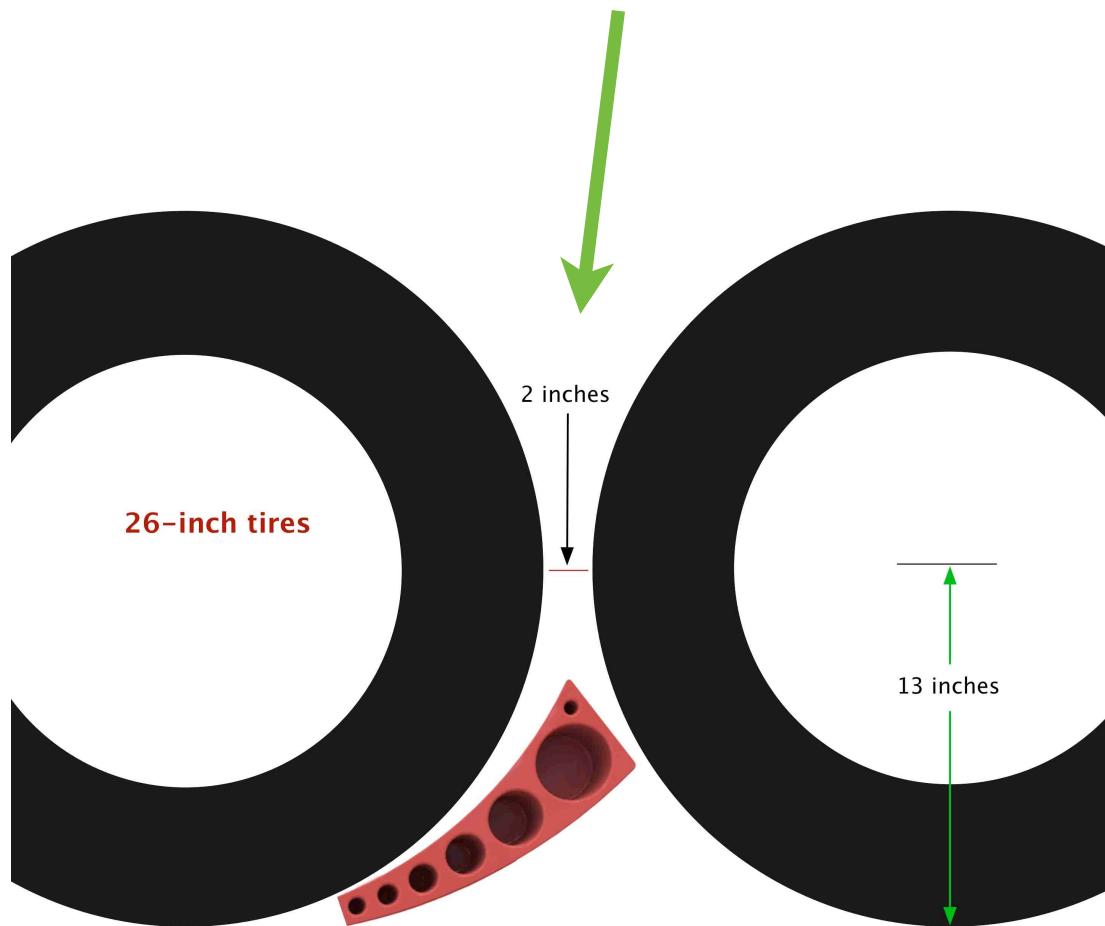

**Figure 4**